

F22 RFID

Ultra Thin Time Attendance And Access Control Terminal



F22 RFID is an ultra-thin time attendance and access control terminal with WiFi, which offers unparalleled performance with advanced algorithm for reliability, precision and excellent matching speed.

F22 RFID provides a superior touching experience with touch keypad, and offers flexibility for standalone installation or with any third-party access control panel that supports standard wiegand signal. TCP/IP, RS485 and Wi-Fi are also available that the device can be used in different networks.

Features

- 2.4-inch TFT color screen and Touch keys
- Ultra thin and elegant design
- Full Access Control Features: Anti-passback, access control interface for 3rd party electric lock, door sensor, exit button, alarm
- Standard Wi-Fi
- Network interface by TCP/IP or RS485
- Built-in auxiliary input with enhanced flexibility to link with wired detector or emergency switch
- Multiple Verification Modes: Multi-verification methods providing user various choice


Specifications

Display	2.4-inch TFT LCD Color Screen
Card Capacity	5000 ID or S50/S70 IC card
Transaction Capacity	30,000
Communication	RS232/485, TCP/IP, USB-host,Wi-Fi
Access Control Interface	3rd Party Electric Lock, Door Sensor, Exit Button, Alarm
Wiegand Signal	Input, Output
Aux. Input	1ea for linkage function
Functions	DST, Automatic Status Switch, Record query, T9 input, 9 digit user ID, Anti-passback, Scheduled-Bell, Printer(Optional), ADMS(Optional)
Power Supply	12V DC,3A
Operating Temperature	0 °C- 45 °C
Operating Humidity	20%-80%
Dimension(LxWxH)	158.5x78.0x19.4mm
SDK and software	Standalone SDK, ZKBio Access

Optional Accessories



Configuration

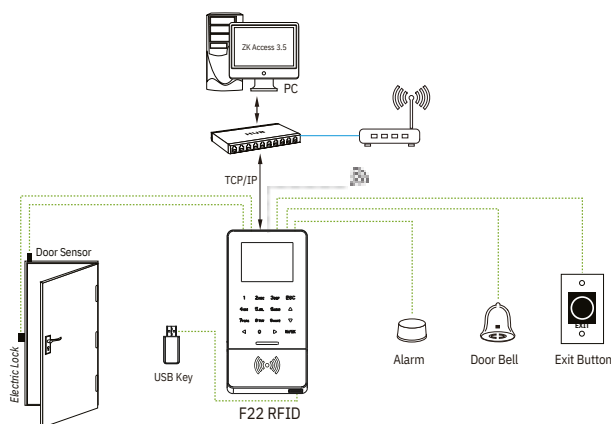

Dimensions (mm)

